PowerArc™ Modular 39W Electronic Metal Halide Ballast Module

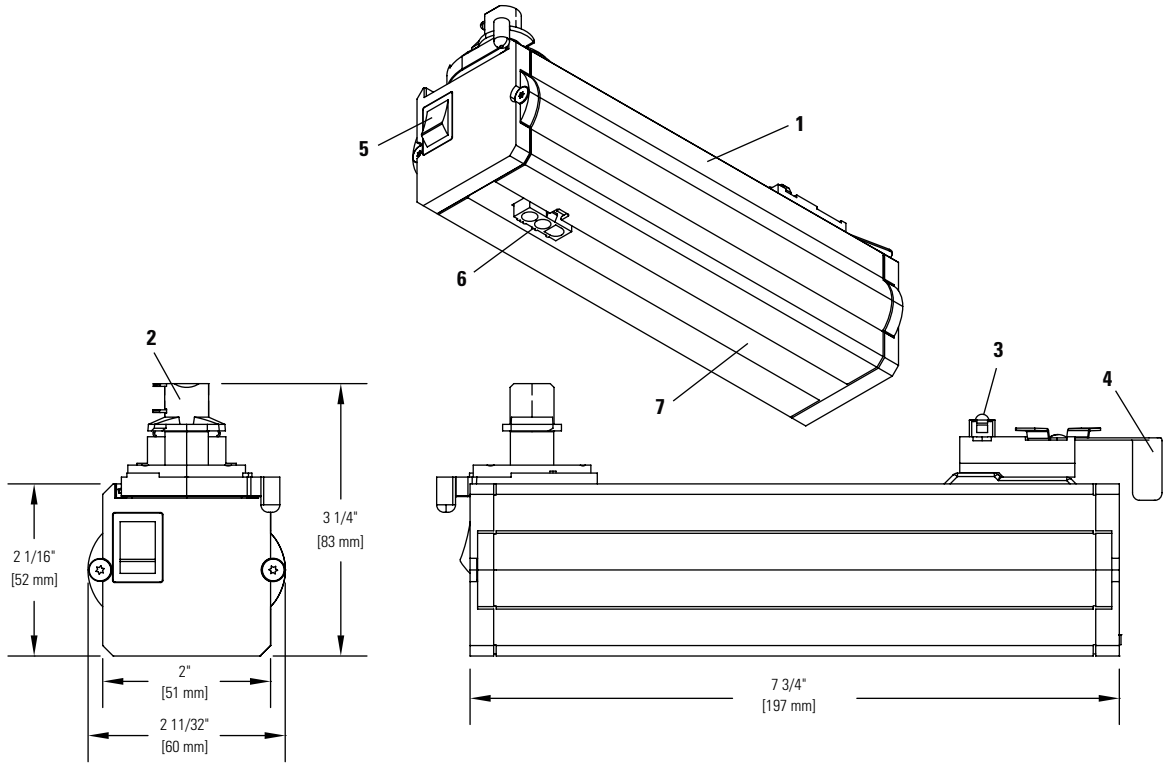

Ordering Information

Catalog No.	Finishes	Track Mountings	Luminaires	Lamp
37B39EWH	Matte White	ProSpec® 120V/277V track systems only.	Use one of:	39W Ceramic
37B39EBK	Matte Black	Not compatible with recessed track and Monopoint.	**8313** **83W4** **8314** **83W6** **8316**	Metal Halide

Features

1. **Housing:** .10" thick extruded aluminum body with die cast end caps.
2. **Track Attachment Fitting:** Molded polycarbonate; rotates into track.
3. **Ground Clip:** Ensures proper grounding of module.
4. **Safety Locking Lever:** Locks and supports module in track.
5. **On/Off Switch:** Rocker switch to disconnect power to the ballast.
6. **Power Connector:** 5kv rated, insulated. Accepts power connector from fixture.
7. **Integral Track Groove:** To mount PowerArc™ Modular spots and wall wash fixtures.

Electrical

Universal Electronic Ballast
Input Voltage: 120V/277V
Power Factor: >0.99
Input Power: 44W
Max Input Current: 0.37@120V/0.16@277V
Total Harmonic Distortion: <10%
ANSI Code: M (C) 130
Do not use on dimming circuit

Finish

All painted finishes are baked enamel.

Labels

UL, cUL

Patents

Products shown here are protected by applicable patents and patents pending.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1108